

Specifications

Reverse sprung hinges and cable channels come standard with every carcass. Compatible with V1 or V2 Locks.


Locks and wiring listed separately.

Lockers 350mm wide – internal width 315mm.

Lockers 450mm wide – internal width 415mm.

Lockers 500mm deep – internal depth 445mm.

Carcass height	- 1800mm
Overall height	- 1945mm (with 25mm shroud)
	- 1938mm (with 18mm shroud)
Shroud thickness	- 25mm or 18mm
Kicker height	- 120mm

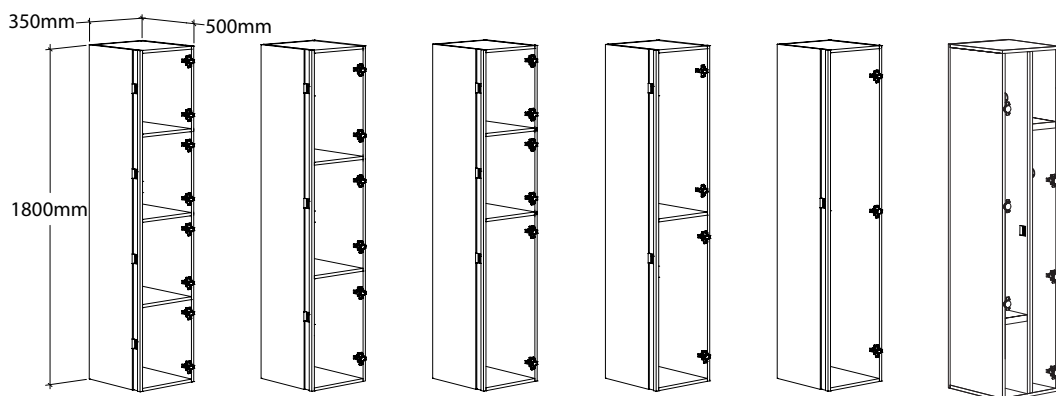

Standard
4 locks

Code: PLC-4A-350
PLC-4A-450



Standard
3 locks

Code: PLC-3A-350
PLC-3A-450



Mixed
3 locks

Code: PLC-3B-350
PLC-3B-450



Standard
2 locks

Code: PLC-2A-350
PLC-2A-450



Standard
1 lock

Code: PLC-1A-350
PLC-1A-450



EOT (end of trip)
2 locks

Code: PLC-EOT-350
PLC-EOT-450

All measurements are in millimeters

All intellectual property rights and copyrights are reserved. Nothing contained in this brochure may be reproduced without written permission. Schiavello Group Pty Ltd reserves the right to change any or all details without prior notice. All dimensions stated within this document are nominal and/or approximate only and subject to variation. SCH/SPL0001-A